

Item # \_\_\_\_\_

Qty # \_\_\_\_\_

Model # \_\_\_\_\_

Project # \_\_\_\_\_



# DUKERS

Quality Commercial Refrigeration



## GAS RANGE

DCR36-2B24GM

36" Combination - 2 Burner & 24" Griddle Top



Knobs

Cooking Surface

GAS RANGE  
MODEL

DIMENSION

Width Depth Height

DCR36-2B24GM

36 in

31 1/2 in

56 in



### PRODUCT DESCRIPTION

- Stainless steel exterior including front, back sides, kick plate, back guard and over shelf
- Heavy duty 12" X 12" removable, cast iron top grates
- Oven temperature range between 175°F to 500°F
- 3/4" NPT rear gas connection and regulator standard.
- Two(2) chrome oven rack per oven standard, multiple position oven rack guides
- Enamel interior oven for easy cleaning.
- 6" casters with lock for easy mobility.



### HIGH QUALITY STAINLESS STEEL & ROBUST DESIGN



Los Angeles | San Francisco | Dallas  
Houston | Florida | Chicago | New Jersey

1-800-931-8628


@ info@dukersusa.com

www.DukersUSA.com


# DETAILS & SPECIFICATIONS

## DCR36-2B24GM


Front View

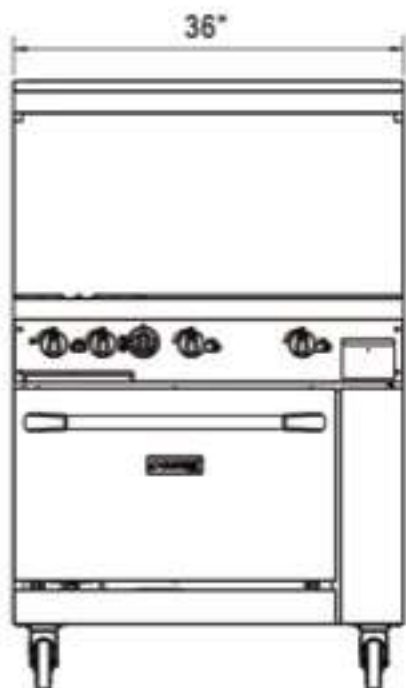

Side View

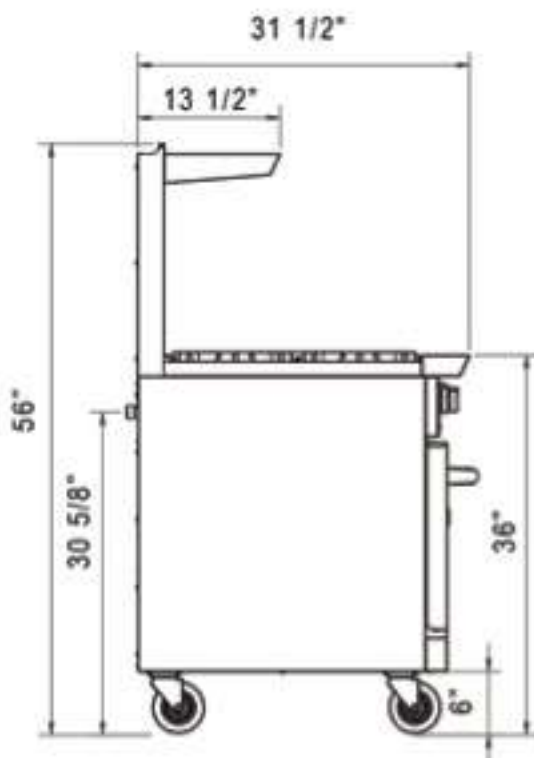

Top View

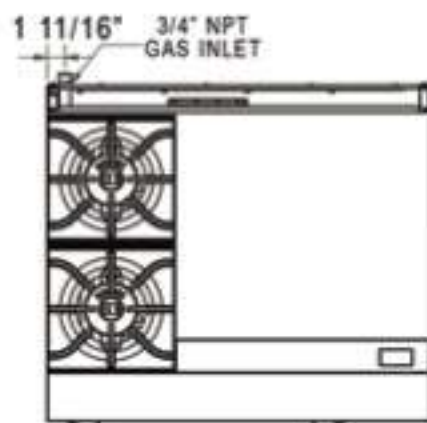


  
 Conforms to NSF/ANSI 7 (ETL)

  
 Proud Member  
 Commercial Food Equipment Association

### Product Specifications

WORKING AREA 12"x24" & 24"x20"

GAS TYPE LPG/NG

	LPG			NG		
	HOT PLATE	GRIDDLE	OVEN	HOT PLATE	GRIDDLE	OVEN
BURNERS	2	2	1	2	2	1
SINGLE OUTPUT BTU	30000 BTU	28000 BTU	35000 BTU	33000 BTU	28000 BTU	35000 BTU
NOZZLE #	52	53	49	41	43	38
TOTAL OUTPUT BTU	151000 BTU			157000 BTU		
GAS PRESSURE	10			5		

Model	Packaging Dimensions (inches)			Net Weight (lbs)	Ship Weight (lbs)	Container Capacity (Units)
	W	D	H			
DCR36-2B24GM	38 1/10	36 4/5"	38 1/5"	399.63	485.43	52



Los Angeles | San Francisco | Dallas  
Houston | Florida | Chicago | New Jersey

1-800-931-8628

info@dukersusa.com

www.DukersUSA.com